
Wood Floors by ABLUX

ABOUT US



Ablux

www.ablux.pl

NEW Lifetime

Verdi

Classic

Traditional

Traditional XL

Art XXL

Maritim XL

Dream Island

Season

NEW Timed

Instruction



THE BEST OF THE WOOD



Quality is our goal
BEST WOOD
Since 1959



[EXPLORE OUR CATALOG](#)



Our family tree

Why Ablux?

We support you with strong arguments for a common and successful cooperation:

QUALITY PRODUCTS

All our products are manufactured according to strict quality criteria. We permanently test the products at German acknowledged test institutes to guarantee to our partners a sustainable continuously quality.

PRODUCT RANGE

We offer a wide range of real wood floorings. To meet the conception of sales, we offer our products in neutral packagings and leave our partners the countless options for their own product presentations.

SALES STRATEGY

We understand us as a partner of the specialists and therefore we sell our products exclusively through the timber-, flooring and building material sales channels. We don't deliver into DIY nor having our own project department.

We are glad to have you here!

SERVICE

All our employees having a wide range of product competences, focussed and working in a solution orientated way. Next to the activities in procurement, product development, quality control and sales, we counting financing, logistics and import handling to our further key competences.

NETWORK

We see us as a part of a global network and have excellent longterm intercontinental cooperations. Our partners benefit from these international contacts and our overseas business experience.

INNOVATION

Our team is continuously developing new and innovative techniques to express still better the timeless beauty of wood. Thanks to our innovations we are proud to look back to nearly 150 years of company history.



NATURALLY SUSTAINABLE

The topic sustainability becomes more and more important, bc. of the limited resources and therefore we have to look for new sustainable solutions, where the humans, the environment and the economical development having their equal positions..

Our factories are certified according to the environmental regulations ISO 14001 and quality regulations ISO 9001.

We are striving for best possible products and services. Further we are looking for a continuously improvement of the product and pay respect to the world where we live in.

Our products coming exclusively from legal forests. The wooden floors fulfill all requirements to guarantee a healthy well being and not to stress our environment.

Thanks to our multilayer construction we are using the raw material wood efficiently and reducing the environmental impact to a minimum. All our products have emission levels far below European standards and regulations.

Further all our products are constructed, so that they are easy to clean and maintain. After their working life our wood floorings can be disposed to the biological recycling process and return back to the environment.

Economically – ecologically – reliability. That are our values for reasonable and sustainable acting. Today, tomorrow and naturally sustainable in the future.





Ablux

**It's going very well:
ready made parquet
flooring by Ablux**

About us

GOOD GROUND? GOOD BASE.

Wood is our core business. And not just since yesterday.

During the decades we have continually developed our assortment according to market conditions. Whereas our current range mainly covers wooden flooring and maintenance products as well as fence and gardening. Composite terrace decking and design flooring round of our assortment. All on the international stage, of course.

Even more important than the products we sell and accompany are our complementary services. Our customers benefit from international market knowledge, years of industry experience and reliability in business relations. Hand on it! Even though we may seem a little old-fashioned in this respect, so we have learned one thing: Only on solid ground trees can grow into the sky. Perhaps this is also a significant facet which distinguishes us from all the greatest in the industry. It is best to find by yourself.



Illustration from our range:
Larch rustic (natural oiled), Oak Prato (smoked and white oiled), Oak Aida (white oiled), American Walnut Royal (natural oiled)

Ready made parquet ist always the right choice.
Classic or modern, but always in highest quality.



Triple good

NEW Lifetime Collection

I-STRIP FLOORING SHORT PLANK

14 x 158 x 1,220 mm



Oak Barock

rustic grade, 4 side
bevelled edges,
brushed, natural oiled



Oak Gotik

rustic grade, 4 side
bevelled edges,
brushed, white oiled



Oak Rokoko

rustic grade, 4 side
bevelled edges,
brushed, smoked,
natural oiled



Oak Romantik

rustic grade, 4 side
bevelled edges,
brushed, smoked,
white oiled



Oak Avantgarde

rustic grade, 4 side
bevelled edges,
brushed, transparent
oiled with SafeTOP®
technology



Ablux

NEW Lifetime Collection

I-STRIP FLOORING SHORT PLANK

14 x 158 x 1,220 mm

- Price entry level
- Interesting look due to short and slim elements
- Visual emphasis with 4 sides bevel on the planks
- Lean assortment with 5 standard surfaces finishes
- Drop-down-clic profile on the short side

www.ablux.pl



NEW Lifetime Collection

I-STRIP FLOORING SHORT PLANK

14 x 158 x 1,220mm

Oak **BAROCK**

rustic grade, 4 side bevelled edges,
brushed, natural oiled





Oak **BAROCK**

rustic grade, 4 side bevelled edges,
brushed, natural oiled
14 x 158 x 1,220 mm



NEW Lifetime Collection

I-STRIP FLOORING SHORT PLANK

14 x 158 x 1,220mm

Oak **GOTIK**

rustic grade, 4 side bevelled edges,
brushed, white oiled



DROP DOWN

The image shows a close-up view of several horizontal wooden planks of oak. The wood has a warm, light brown tone with prominent, wavy grain patterns and several dark, irregular knots. The planks are laid out in a staggered fashion, with some overlapping others. The lighting is even, highlighting the natural texture and imperfections of the wood.

Oak **GOTIK**

rustic grade, 4 side bevelled edges,
brushed, white oiled
14 x 158 x 1,220mm



NEW Lifetime Collection

I-STRIP FLOORING SHORT PLANK

14 x 158 x 1,220mm

Oak **ROKOKO**

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled



DROP DOWN



Oak **ROKOKO**

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled
14 x 158 x 1,220 mm



NEW Lifetime Collection

I-STRIP FLOORING SHORT PLANK

14 x 158 x 1,220mm

Oak **ROMANTIK**

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled



DROP DOWN



Oak **ROMANTIK**

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled
14 x 158 x 1,220 mm



NEW Lifetime Collection

I-STRIP FLOORING SHORT PLANK

14 x 158 x 1,220mm

Oak **AVANTGARDE**

rustic grade, 4 side bevelled edges,
brushed, transparent oiled with SafeTOP® technology



A close-up photograph of a light-colored oak wood floor. The planks are arranged in a staggered pattern, showing natural wood grain, knots, and some minor imperfections. The lighting is even, highlighting the texture of the wood.

Oak **AVANTGARDE**

rustic grade, 4 side bevelled edges, brushed,
transparent oiled with SafeTOP® technology
14 x 158 x 1,220 mm

NEW Lifetime Collection

TECHNICAL DATA SHEET

Country of Origin

China

Installation System

Drop-Down

Ready Made Parquet

NEW Lifetime Collection

Composition

3-ply engineered parquet, wood moisture 7% (+/- 2%) acc. to DIN EN 13489, 4 side bevelled edges, top layer approx. 3 mm, middle layer 9 mm and back layer 2 mm from poplar. Max. 25% nested length per box

Specification

Oak wooden 1-strip flooring

Grading

Rustic: knotty appearance with cracks and sapwood

Packaging

Shrink wrapped, neutral black carton box with label stickers describing product specification. Installation and maintenance guide are included in every second box.

Dimension

14 x 158 x 1,220 mm

Thermal conductivity

0.14 W/mK

Surface

Coated with oxidative natural oil

Thermal passage value

0.12 m² K/W

Packing units

8 planks

= 1 box

= 1.542 m²

48 boxes

= 1 pallet

= 74.016 m²

18 pallets

= 20' container

= 1,332.288 m²

36 pallets

= 40' container

= 2,664.576 m²



DROP DOWN



Density and Thickness

> 500 kg/m³; ≥ 14 mm

Reaction to fire

D_s-s1

Release of formaldehyde

E1

Thermal conductivity

0.14 W/mK

Biological durability

Class 1

Verdi Collection

CLASSIC I-STRIP FLOORING MADE IN EUROPE

14 x 180 x 2,200 mm



Oak Nabucco

rustic grade, 4 side
bevelled edges,
brushed, natural oiled



Oak Aida

rustic grade, 4 side
bevelled edges,
brushed, white oiled



Verdi Collection

CLASSIC I-STRIP FLOORING MADE IN EUROPE

14 x 180 x 2,200 mm

Oak **NABUCCO**

rustic grade, 4 side bevelled edges,
brushed, natural oiled





Oak **NABUCCO**

rustic grade, 4 side bevelled edges,
brushed, natural oiled
14 x 180 x 2,200mm



Verdi Collection

CLASSIC I-STRIP FLOORING MADE IN EUROPE

14 x 180 x 2,200 mm

Oak **AIDA**

rustic grade, 4 side bevelled edges,
brushed, white oiled





Oak **AIDA**

rustic grade, 4 side bevelled edges,
brushed, white oiled
14 x 180 x 2,200mm

Verdi Collection

TECHNICAL DATA SHEET

Country of Origin

Europe

Installation System

5Gc®

Ready Made Parquet

Verdi Collection

Composition

3-ply engineered parquet, wood moisture 7% (+/- 2%) acc. to DIN EN 13489, 4 side bevelled edges, top layer approx. 2.5 mm, middle layer 9 mm and back layer 2.5 mm from pine.

Specification

Oak wooden 1-strip flooring

Packaging

Shrink wrapped, neutral black carton box with label stickers describing product specification. Installation and maintenance guide are included in every second box.

Grading

Rustic: knotty appearance with cracks & sapwood

Dimension

14 x 180 x 2,200 mm

Thermal conductivity

0.14 W/mK

Surface

Twice coated with oxidative natural oil

Thermal passage value

0.11 m² K/W

Packing units

7 planks

= 1 box

= 2.77 m²

40 boxes

= 1 pallet

= 110.80 m²

24 pallets

= 1 LKW

= 2,659.20 m²



Density and Thickness

> 500 kg/m³; ≥ 14 mm

Reaction to fire

D₁-s1

Release of formaldehyde

E1

Thermal conductivity

0.14 W/mK

Biological durability

Class 1

Classic Collection

I-STRIP FLOORING

14 x 190 x 1,860 mm
14 x 190 x 1,900 mm
15 x 189 x 1,860 mm



Oak Brida

14 x 190 x 1,860 mm,
rustic grade, 4 side bevelled edges, brushed, transparent oiled with SafeTOP® technology



Oak Noblesse

14 x 190 x 1,900 mm,
standard grade, 4 side bevelled edges, brushed, natural oiled



Oak Comfort

14 x 190 x 1,900 mm,
standard grade, 4 side bevelled edges, brushed, white oiled



Oak Linhart

15 x 189 x 1,860 mm,
nature-grade, long-side bevelled edges, brushed, nature oiled



Oak Clewin

15 x 189 x 1,860 mm,
rustic grade, long-side bevelled edges, brushed, natural oiled




Oak Wendel

15 x 189 x 1,860 mm,
rustic grade, long-side bevelled edges, brushed, white oiled



Oak Endres

15 x 189 x 1,860 mm,
country grade, long-side bevelled edges, brushed, natural oiled




Oak Auberlin

15 x 189 x 1,860 mm,
rustic grade, long-side bevelled edges, heavy smoked, brushed, natural oiled




Oak Bentz

15 x 189 x 1,860 mm,
rustic grade, long-side bevelled edges, heavy smoked, brushed, white oiled




Larch Ennlin

15 x 189 x 1,860 mm,
rustic grade, long-side bevelled edges, heavy brushed, natural oiled



Larch Ketlin

15 x 189 x 1,860 mm,
rustic grade, long-side bevelled edges, heavy brushed, white oiled



Am. Walnut Hawaii

15 x 189 x 1,860 mm,
mix-grade royal, 4 side bevelled edges, natural oiled



Classic Collection

I-STRIP FLOORING

14 x 190 x 1,860mm

Oak **BRIDA**

rustic grade, 4 side bevelled edges,
brushed, transparent oiled with SafeTOP® technology





Oak **BRIDA**

rustic grade, 4 side bevelled edges, brushed,
transparent oiled with SafeTOP® technology
14 x 190 x 1,860 mm



Classic Collection

I-STRIP FLOORING


14 x 190 x 1,900mm

Oak **NOBLESSE**

standard grade, 4 side bevelled edges,
brushed, natural oiled



DROP DOWN



Oak **NOBLESSE**

.....
standard grade, 4 side bevelled edges,
brushed, natural oiled
14 x 190 x 1,900 mm



Classic Collection

I-STRIP FLOORING

14 x 190 x 1,900mm

Oak COMFORT

standard grade, 4 side bevelled edges,
brushed, white oiled





Oak **COMFORT**

.....
standard grade, 4 side bevelled edges,
brushed, white oiled
14 x 190 x 1,900 mm



Classic Collection

I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **LINHART**

nature-grade, longside bevelled edges,
brushed, natural oiled



The image shows a close-up of a wooden floor made of oak planks. The planks are arranged in a staggered pattern, with each plank overlapping the one below it. The wood has a warm, medium-brown tone and a prominent, wavy grain pattern. The surface appears slightly textured, consistent with a brushed finish. In the bottom left corner, there is a white horizontal line above the text 'Oak LINHART'.

Oak **LINHART**

nature-grade, longside bevelled edges,
brushed, natural oiled
15 x 189 x 1,860 mm



Classic Collection

I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **CLEWIN**

rustic grade, longside bevelled edges,
brushed, natural oiled



A close-up photograph of a light-colored oak wood floor. The planks are arranged in a staggered pattern, showing the natural grain and knots of the wood. The surface has a slightly brushed texture.

Oak **CLEWIN**

rustic grade, longside bevelled edges,
brushed, natural oiled
15 x 189 x 1,860 mm



Classic Collection

I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **WENDEL**

rustic grade, longside bevelled edges,
brushed, white oiled



DROP DOWN



Oak **WENDEL**

rustic grade, longside bevelled edges,
brushed, white oiled
15 x 189 x 1,860 mm



Classic Collection

I-STRIP FLOORING


15 x 189 x 1,860mm

Oak **ENDRES**

country grade, longside bevelled edges,
brushed, natural oiled



DROP DOWN

The image shows a close-up, horizontal view of a wooden surface made of oak planks. The wood has a warm, light brown tone with prominent, wavy grain patterns and several dark, irregular knots and streaks. The planks are laid in a staggered pattern, with some showing bevelled edges. The lighting is even, highlighting the natural texture and imperfections of the wood.

Oak **ENDRES**

country grade, longside bevelled edges,
brushed, natural oiled
15 x 189 x 1,860 mm



Classic Collection

I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **AUBERLIN**

rustic grade, longside bevelled edges,
heavy smoked, brushed, natural oiled



DROP DOWN

Oak **AUBERLIN**

rustic grade, longside bevelled edges,
heavy smoked, brushed, natural oiled
15 x 189 x 1,860 mm



Classic Collection

I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **BENTZ**

rustic grade, longside bevelled edges,
heavy smoked, brushed, white oiled



DROP DOWN



Oak **BENTZ**

rustic grade, longside bevelled edges,
heavy smoked, brushed, white oiled
15 x 189 x 1,860 mm



Classic Collection

I-STRIP FLOORING

15 x 189 x 1,860mm

Larch **ENNLIN**

rustic grade, longside bevelled edges,
heavy brushed, natural oiled





Larch **ENNLIN**

rustic grade, longside bevelled edges,
heavy brushed, natural oiled
15 x 189 x 1,860 mm



Classic Collection

I-STRIP FLOORING

15 x 189 x 1,860mm

Larch **KETLIN**

rustic grade, longside bevelled edges,
heavy brushed, white oiled



DROP DOWN



Larch **KETLIN**

rustic grade, longside bevelled edges,
heavy brushed, white oiled
15 x 189 x 1,860 mm



Classic Collection

I-STRIP FLOORING

15 x 189 x 1,860mm

Am. Walnut **HAWAII**

mix-grade royal, 4 side bevelled edges,
natural oiled



DROP DOWN

Am. Walnut **HAWAII**

.....
mix-grade royal, 4 side bevelled edges,
natural oiled
15 x 189 x 1,860 mm

Classic Collection

TECHNICAL DATA SHEET

Country of Origin

China

Ready Made Parquet

Classic Collection

Specification

Classic oak wooden 1-strip flooring
Classic larch wooden 1-strip flooring
Walnut wooden 1-strip flooring

Grading

Natural: almost no knots and without sapwood
Standard: knotty grading almost without sapwood
Rustic: knotty appearance with cracks & sapwood
Country: knotty grading with slightly sapwood
Mix-Grade Royal

Dimension

14 x 190 x 1,860 mm
14 x 190 x 1,900 mm
15 x 189 x 1,860 mm

Surface

Coated with oxidative natural oil
SafeTOP®: Special transparent and oxidative
surface treatment process

Installation System

Drop-Down

Composition

3-ply engineered parquet, wood moisture 8%
(+/- 1%), 2 sides bevelled edges, top layer approx.
3 or 4 mm, middle layer 9 mm and back layer 2 mm
from poplar, max. 25% nested length per box.

Packaging

Shrink wrapped, neutral black carton box with
label stickers describing product specification.
Installation and maintenance guide are included
in every second box.

Thermal conductivity

0.14 W/mK

Thermal passage value

0.12 m² K/W

Packing units 14 x 190 x 1,860 mm	8 planks	= 1 box	= 2.827 m ²
	40 boxes	= 1 pallet	= 113.088 m ²
	12 pallets	= 20' container	= 1,357.056 m ²
	24 pallets	= 40' container	= 2,714.112 m ²
Packing units 14 x 190 x 1,900 mm	8 planks	= 1 box	= 2.888 m ²
	40 boxes	= 1 pallet	= 115.520 m ²
	12 pallets	= 20' container	= 1,386.240 m ²
	24 pallets	= 40' container	= 2,772.480 m ²
Packing units 15 x 189 x 1,860 mm	8 planks	= 1 box	= 2.812 m ²
	40 boxes	= 1 pallet	= 112.493 m ²
	12 pallets	= 20' container	= 1,349.914 m ²
	24 pallets	= 40' container	= 2,699.828 m ²

Traditional Collection

TRADITIONAL I-STRIP FLOORING

14 x 189 x 1,860 mm
15 x 189 x 1,860 mm



Oak Alabama

14 x 189 x 1,860 mm,
nature-grade, 4 side
bevelled edges,
brushed, white oiled



Oak Safari

15 x 189 x 1,860 mm,
rustic grade, 4 side
bevelled edges, hand
scraped, natural oiled



Oak Arktis

15 x 189 x 1,860 mm,
rustic grade, 4 side
bevelled edges, hand
scraped, white oiled



Oak Colorado

15 x 189 x 1,860 mm,
rustic grade, 4 side
bevelled edges, hand
scraped, smoked,
natural oiled



Oak Nebraska

15 x 189 x 1,860 mm,
rustic grade, 4 side
bevelled edges, hand
scraped, smoked,
white oiled



Oak Como

15 x 189 x 1,860 mm,
rustic grade, 4 side
bevelled edges,
brushed, smoked,
natural oiled



Oak Prato

15 x 189 x 1,860 mm,
rustic grade, 4 side
bevelled edges,
brushed, smoked,
white oiled



Oak Texas

15 x 189 x 1,860 mm,
rustic grade, 4 side
bevelled edges,
brushed, smoked,
stone grey oiled



Oak Maine

15 x 189 x 1,860 mm,
rustic grade, 4 side
bevelled edges, hand
scraped, transparent
oiled with SafeTOP®
technology



Traditional Collection

TRADITIONAL I-STRIP FLOORING

14 x 189 x 1,860mm

Oak **ALABAMA**

nature-grade, 4 side bevelled edges,
brushed, white oiled





Oak **ALABAMA**

.....
nature-grade, 4 side bevelled edges,
brushed, white oiled
14 x 189 x 1,860 mm



Traditional Collection

TRADITIONAL I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **SAFARI**

rustic grade, 4 side bevelled edges,
hand scraped, natural oiled





Oak **SAFARI**

rustic grade, 4 side bevelled edges,
hand scraped, natural oiled
15 x 189 x 1,860 mm



Traditional Collection

TRADITIONAL I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **ARKTIS**

rustic grade, 4 side bevelled edges,
hand scraped, white oiled





Oak **ARKTIS**

rustic grade, 4 side bevelled edges,
hand scraped, white oiled
15 x 189 x 1,860 mm



Traditional Collection

TRADITIONAL I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **COLORADO**

rustic grade, 4 side bevelled edges,
hand scraped, smoked, natural oiled





Oak **COLORADO**

rustic grade, 4 side bevelled edges,
hand scraped, smoked, natural oiled
15 x 189 x 1,860 mm



Traditional Collection

TRADITIONAL I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **NEBRASKA**

rustic grade, 4 side bevelled edges,
hand scraped, smoked, white oiled





Oak **NEBRASKA**

rustic grade, 4 side bevelled edges,
hand scraped, smoked, white oiled
15 x 189 x 1,860 mm



Traditional Collection

TRADITIONAL I-STRIP FLOORING

15 x 189 x 1,860mm

Oak Como

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled





Oak **Como**

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled
15 x 189 x 1,860 mm



Traditional Collection

TRADITIONAL I-STRIP FLOORING

15 x 189 x 1,860mm

Oak PRATO

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled



The image shows a close-up, horizontal view of a wooden plank with a rustic, weathered appearance. The wood grain is prominent, with several knots and dark, irregular spots (possibly from smoking or staining) scattered across the surface. The color is a warm, medium-brown. The plank is part of a larger assembly, with other planks visible above and below it, separated by thin, light-colored lines.

Oak **PRATO**

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled
15 x 189 x 1,860mm



Traditional Collection

TRADITIONAL I-STRIP FLOORING

15 x 189 x 1,860mm

Oak **TEXAS**

rustic grade, 4 side bevelled edges,
brushed, smoked, stone grey oiled



DROP DOWN

The image shows a close-up of several horizontal wooden planks. The wood has a warm, medium-brown tone with visible grain patterns and some darker spots, possibly knots or imperfections. The planks are arranged in a staggered pattern, typical of a rustic wood floor or wall paneling. The lighting is even, highlighting the natural texture of the wood.

Oak **TEXAS**

rustic grade, 4 side bevelled edges,
brushed, smoked, stone grey oiled
15 x 189 x 1,860mm



Traditional Collection

TRADITIONAL I-STRIP FLOORING

15 x 189 x 1,860mm

Oak MAINE

rustic grade, 4 side bevelled edges,
hand scraped, transparent oiled with SafeTOP® technology





Oak **MAINE**

rustic grade, 4 side bevelled edges, hand scraped,
transparent oiled with SafeTOP® technology
15 x 189 x 1,860 mm

Traditional Collection

TECHNICAL DATA SHEET

Country of Origin

China

Installation System

Drop-Down

Ready Made Parquet

Traditional Collection

Composition

3-ply engineered parquet, wood moisture 8% (+/- 1%), 4-sides bevelled edges, top layer approx. 3 or 4 mm (+/- 10%), middle layer 9 mm and back layer 2 mm from poplar, max. 25% nested length per box.

Specification

Traditional oak wooden 1-strip flooring

Grading

Natural: almost no knots and without sapwood
Rustic: knotty appearance with cracks & sapwood

Packaging

Shrink wrapped, neutral black carton box with label stickers describing product specification. Installation and maintenance guide are included in every second box.

Dimension

14 x 189 x 1,860 mm
15 x 189 x 1,860 mm

Thermal conductivity

0.14 W/mK

Surface

Coated with oxidative natural oil
Lacquering with PPG according to E1 regulation

Thermal passage value

0.12 m² K/W

Packing units

14/15 x 189 x
1,860 mm

8 planks

40 boxes

12 pallets

24 pallets

= 1 box

= 1 pallet

= 20' container

= 40' container

= 2.812 m²

= 112.493 m²

= 1,349.914 m²

= 2,699.827 m²



DROP DOWN



Density and Thickness

550 kg/m³ ; 14 - 16 mm

Reaction to fire

D₁-s1

Release of formaldehyde

E1

Thermal conductivity

0.14 W/mK

Biological durability

Class 1

Traditional XL Collection

I-STRIP FLOORING IN WIDE BOARD OPTICS

15 x 260 x 2,200 mm



Oak Emilia XL

rustic grade, 4 side
bevelled edges,
brushed, natural oiled



Oak Matera XL

rustic grade, 4 side
bevelled edges,
brushed, white oiled



Oak Como XL

rustic grade, 4 side
bevelled edges,
brushed, smoked,
natural oiled



Oak Prato XL

rustic grade, 4 side
bevelled edges,
brushed, smoked,
white oiled



Oak Messina XL

rustic grade, 4 side
bevelled edges,
brushed, transparent
oiled with SafeTOP®
technology



Traditional XL Collection

I-STRIP FLOORING IN WIDE BOARD OPTICS

15 x 260 x 2,200 mm

Oak **EMILIA XL**

rustic grade, 4 side bevelled edges,
brushed, natural oiled



The image shows a close-up of several horizontal wooden planks of oak. The wood has a warm, light brown tone with prominent grain patterns and several dark knots. The planks are arranged in a staggered fashion, with some overlapping others. The lighting is even, highlighting the natural texture and imperfections of the wood.

Oak **EMILIA XL**

rustic grade, 4 side bevelled edges,
brushed, natural oiled
15 x 260 x 2,200 mm



Traditional XL Collection

I-STRIP FLOORING IN WIDE BOARD OPTICS

15 x 260 x 2,200 mm

Oak **MATERA XL**

rustic grade, 4 side bevelled edges,
brushed, white oiled



DROP DOWN



Oak **MATERA XL**

rustic grade, 4 side bevelled edges,
brushed, white oiled
15 x 260 x 2,200 mm



Traditional XL Collection

I-STRIP FLOORING IN WIDE BOARD OPTICS

15 x 260 x 2,200 mm

Oak **COMO XL**

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled



DROP DOWN



Oak **COMO XL**

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled
15 x 260 x 2,200 mm



Traditional XL Collection

I-STRIP FLOORING IN WIDE BOARD OPTICS

15 x 260 x 2,200 mm

Oak PRATO XL

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled



DROP DOWN

The image shows a close-up, horizontal view of a wooden surface with a prominent grain pattern. The wood is a light to medium brown color, with darker, wavy lines representing the grain. There are several knots and small dark spots scattered across the surface. The texture appears slightly rough and natural. In the bottom left corner, there is a white rectangular area containing text.

Oak **PRATO XL**

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled
15 x 260 x 2,200 mm



Traditional XL Collection

I-STRIP FLOORING IN WIDE BOARD OPTICS

15 x 260 x 2,200 mm

Oak **MESSINA XL**

rustic grade, 4 side bevelled edges,
brushed, transparent oiled with SafeTOP® technology





Oak **MESSINA XL**

rustic grade, 4 side bevelled edges, brushed,
transparent oiled with SafeTOP® technology
15 x 260 x 2,200 mm

Traditional XL Collection

TECHNICAL DATA SHEET

Country of Origin

China

Installation System

Drop-Down

Ready Made Parquet

Traditional XL Collection

Composition

3-ply engineered parquet, wood moisture 8% (+/- 1%), 4-sides bevelled edges, top layer approx. 4 mm (+/- 10%), middle layer 9 mm and back layer 2 mm from poplar, max. 1 nested length per box.

Specification

Oak wooden 1-strip flooring

Packaging

Shrink wrapped, neutral black carton box with label stickers describing product specification. Installation and maintenance guide are included in every second box.

Grading

Rustic: knotty appearance with cracks and sapwood

Dimension

15 x 260 x 2,200 mm

Thermal conductivity

0.14 W/mK

Surface

Coated with oxidative natural oil

Thermal passage value

0.12 m² K/W

Packing units

6 planks

= 1 box

= 3.432 m²

33 boxes

= 1 pallet

= 113.256 m²

14 pallets

= 20' container

= 1,585.584 m²

28 pallets

= 40' container

= 3,171.168 m²



Density and Thickness

550 kg/m³ ; 14 - 15 mm

Reaction to fire

D₁-s1

Release of formaldehyde

E1

Thermal conductivity

0.14 W/mK

Biological durability

Class 1

Art XXL Collection

I-STRIP FLOORING IN WIDE AND LONG BOARD OPTICS

15 x 260 x 2,800 mm



Oak Louvre XXL

rustic grade, 4 side
bevelled edges,
brushed, natural oiled




Oak Tate XXL

rustic grade, 4 side
bevelled edges,
brushed, smoked,
natural oiled



Oak Moma XXL

rustic grade, 4 side
bevelled edges,
brushed, smoked,
white oiled



Oak Pergamon XXL

rustic grade, 4 side
bevelled edges,
brushed, transparent
oiled with SafeTOP®
technology



Art XXL Collection

I-STRIP FLOORING IN WIDE AND LONG BOARD OPTICS

15 x 260 x 2,800 mm

Oak **LOUVRE XXL**

standard grade, 4 side bevelled edges,
brushed, natural oiled



DROP DOWN

The image shows a close-up, horizontal view of a light-colored oak wood surface. The wood grain is prominent, with various knots and natural imperfections visible. The texture is slightly brushed, giving it a matte, natural appearance. The color is a warm, light tan or beige. The wood is laid in a standard plank pattern, with the grain running horizontally across the frame.

Oak **LOUVRE XXL**

.....
standard grade, 4 side bevelled edges,
brushed, natural oiled
15 x 260 x 2,800 mm



Art XXL Collection

I-STRIP FLOORING IN WIDE AND LONG BOARD OPTICS

15 x 260 x 2,800 mm

Oak **TATE XXL**

standard grade, 4 side bevelled edges,
brushed, smoked, natural oiled



The background of the entire page is a close-up, high-resolution photograph of oak wood. The wood grain is prominent, showing a mix of light tan and medium brown tones. There are several knots and natural imperfections visible, such as dark spots and small cracks, which add to the rustic and organic feel of the material. The lighting is even, highlighting the texture of the wood fibers.

Oak **TATE XXL**

.....
standard grade, 4 side bevelled edges,
brushed, smoked, natural oiled
15 x 260 x 2,800 mm



Art XXL Collection

I-STRIP FLOORING IN WIDE AND LONG BOARD OPTICS

15 x 260 x 2,800 mm

Oak **MOMA XXL**

standard grade, 4 side bevelled edges,
brushed, smoked, white oiled



DROP DOWN

The image shows a close-up, horizontal view of a light-colored oak wood surface. The wood grain is prominent, with wavy, vertical lines and several dark, circular knots scattered across the surface. The wood has a slightly weathered or brushed appearance. In the bottom left corner, there is a white horizontal line above the text.

Oak **MOMA XXL**

.....
standard grade, 4 side bevelled edges,
brushed, smoked, white oiled
15 x 260 x 2,800 mm



Art XXL Collection

I-STRIP FLOORING IN WIDE AND LONG BOARD OPTICS

15 x 260 x 2,800 mm

Oak **PERGAMON XXL**

standard grade, 4 side bevelled edges,
brushed, transparent oiled with SafeTOP® technology



The background of the entire page is a close-up, high-resolution image of oak wood. The wood grain is prominent, showing a mix of light tan and golden-brown tones. There are several dark, circular knots scattered throughout the surface. The texture appears slightly rough and natural, consistent with the 'brushed' description in the text. The lighting is even, highlighting the natural variations in the wood's color and grain.

Oak **PERGAMON XXL**

.....
standard grade, 4 side bevelled edges, brushed,
transparent oiled with SafeTOP® technology
15 x 260 x 2,800 mm

Art XXL Collection

TECHNICAL DATA SHEET

Country of Origin

China

Installation System

Drop-Down

Ready Made Parquet

Art XXL Collection

Composition

3-ply engineered parquet, wood moisture 8% (+/- 1%), 4-sides bevelled edges, top layer approx. 4 mm (+/- 10%), middle layer 9 mm and back layer 2 mm from poplar, max. 1 nested length per box.

Specification

Oak wooden 1-strip flooring

Packaging

Shrink wrapped, neutral black carton box with label stickers describing product specification. Installation and maintenance guide are included in every second box.

Grading

Rustic: knotty appearance with cracks and sapwood

Dimension

15 x 260 x 2,800 mm

Thermal conductivity

0.14 W/mK

Surface

Coated with oxidative natural oil

Thermal passage value

0.12 m² K/W

Packing units

4 planks

= 1 box

= 2.912 m²

28 boxes

= 1 pallet

= 81.536 m²

12 pallets

= 20' container

= 978.536 m²

20 pallets

= 40' container

= 1,956.864 m²



Density and Thickness

550 kg/m³ ; 14 - 15 mm

Reaction to fire

D₁-s1

Release of formaldehyde

E1

Thermal conductivity

0.14 W/mK

Biological durability

Class 1

Maritim XL Collection

I-STRIP FLOORING WITH 3D-BRUSH

15 x 260 x 2,200 mm



Oak Pacific XL

rustic grade, 4 side
bevelled edges, Loopy-
Face® technology,
transparent oiled with
SafeTOP® technology




Oak Ocean XL

rustic grade, 4 side
bevelled edges, Loopy-
Face® technology,
natural oiled



Oak Breeze XL

rustic grade, 4 side
bevelled edges, Loopy-
Face® technology,
heavy smoked, natural
oiled




Oak Sail XL

rustic grade, 4 side
bevelled edges, Loopy-
Face® technology,
heavy smoked, white
oiled



Oak Marina XL

rustic grade, 4 side
bevelled edges, Loopy-
Face® technology, light
smoked, natural oiled



Oak Nautic XL

rustic grade, 4 side
bevelled edges, Loopy-
Face® technology, light
smoked, white oiled



Maritim XL Collection

I-STRIP FLOORING WITH 3D-BRUSH

15 x 260 x 2,200 mm

Oak **PACIFIC XL**

rustic grade, 4 side bevelled edges,
Loopy-Face® technology, transparent oiled with SafeTOP® technology



DROP DOWN



LOOPY-FACE®
TECHNOLOGY



SAFETOP®
TECHNOLOGY

The background of the entire page is a close-up, high-resolution photograph of a light-colored oak wood surface. The wood grain is clearly visible, showing a mix of straight and wavy patterns. There are several prominent knots and some darker, irregular stains or imperfections scattered across the surface, contributing to a rustic appearance. The lighting is even, highlighting the natural texture and color variations of the wood.

Oak **PACIFIC XL**

rustic grade, 4 side bevelled edges,
Loopy-Face® technology, transparent oiled
with SafeTOP® technology
15 x 260 x 2,200 mm



Maritim XL Collection

I-STRIP FLOORING WITH 3D-BRUSH

15 x 260 x 2,200 mm

Oak OCEAN XL

rustic grade, 4 side bevelled edges,
Loopy-Face® technology, natural oiled



DROP DOWN



Oak **OCEAN XL**

rustic grade, 4 side bevelled edges,
Loopy-Face® technology, natural oiled
15 x 260 x 2,200 mm



Maritim XL Collection

I-STRIP FLOORING WITH 3D-BRUSH

15 x 260 x 2,200 mm

Oak **BREEZE XL**

rustic grade, 4 side bevelled edges,
Loopy-Face® technology, heavy smoked, natural oiled





Oak **BREEZE XL**

rustic grade, 4 side bevelled edges, Loopy-Face®
technology, heavy smoked, natural oiled
15 x 260 x 2,200 mm



Maritim XL Collection

I-STRIP FLOORING WITH 3D-BRUSH

15 x 260 x 2,200 mm

Oak **SAIL XL**

rustic grade, 4 side bevelled edges,
Loopy-Face® technology, heavy smoked, white oiled



Eiche **SAIL XL**

rustic grade, 4 side bevelled edges, Loopy-Face®
technology, heavy smoked, white oiled
15 x 260 x 2,200 mm



Maritim XL Collection

I-STRIP FLOORING WITH 3D-BRUSH

15 x 260 x 2,200 mm

Oak **MARINA XL**

rustic grade, 4 side bevelled edges,
Loopy-Face® technology, light smoked, nature oiled



DROP DOWN



Oak **MARINA XL**

rustic grade, 4 side bevelled edges, Loopy-Face®
technology, light smoked, nature oiled
15 x 260 x 2,200 mm



Maritim XL Collection

I-STRIP FLOORING WITH 3D-BRUSH

15 x 260 x 2,200 mm

Oak NAUTIC XL

rustic grade, 4 side bevelled edges,
Loopy-Face® technology, light smoked, white oiled



DROP DOWN



LOOPY-FACE®
TECHNOLOGY

Oak NAUTIC XL

rustic grade, 4 side bevelled edges,
Loopy-Face® technology, light smoked, white oiled
15 x 260 x 2,200 mm

Maritim XL Collection

TECHNICAL DATA SHEET

Country of Origin

China

Installation System

Drop-Down

Ready Made Parquet

Maritim XL Collection

Composition

3-ply engineered parquet, wood moisture 8% (+/- 1%), 4-sides bevelled edges, top layer approx. 4 mm (+/- 10%), middle layer 9 mm and back layer 2 mm from poplar, max. 1 nested length per box.

Specification

Oak wooden 1-strip flooring

Packaging

Shrink wrapped, neutral black carton box with label stickers describing product specification. Installation and maintenance guide are included in every second box.

Grading

Rustic: knotty appearance with cracks and sapwood

Dimension

15 x 260 x 2,200 mm

Thermal conductivity

0.14 W/mK

Surface

Coated with oxidative natural oil

Thermal passage value

0.12 m² K/W

Packing units

6 planks

= 1 box

= 3.432 m²

33 boxes

= 1 pallet

= 113.256 m²

14 pallets

= 20' container

= 1,585.584 m²

28 pallets

= 40' container

= 3,171.168 m²



DROP DOWN

LF
LOOPY-FACE®
TECHNOLOGY

ST
SAFETOP®
TECHNOLOGY

CE

Density and Thickness

550 kg/m³ ; 14 - 15 mm

Reaction to fire

D₁-s1

Release of formaldehyde

E1

Thermal conductivity

0.14 W/mK

Biological durability

Class 1

Dream Island Collection

EXCLUSIVE I-STRIP FLOORING

15 x 190 x 1,900 mm



Oak Bali

rustic grade, 4 side
bevelled edges, struc-
tured, color-processed,
hard wax oil natural



Oak Samui

rustic grade, 4 side
bevelled edges, struc-
tured, color-processed,
hard wax oil white



Oak Boracay

rustic grade, 4 side
bevelled edges, struc-
tured, light color-pro-
cessed, hard wax oil
natural



Oak Sumatra

rustic grade, 4 side
bevelled edges, struc-
tured, dark color-pro-
cessed, hard wax oil
natural



Maple Java

rustic grade, 4 side
bevelled edges, struc-
tured, color-processed,
hard wax oil natural



Dream Island Collection


EXCLUSIVE I-STRIP FLOORING

15 x 190 x 1,900mm

Oak **BALI**

rustic grade, 4 side bevelled edges,
structured, color-processed, hard wax oil natural





Oak **BALI**

rustic grade, 4 side bevelled edges,
structured, color-processed, hard wax oil natural
15 x 190 x 1,900 mm



Dream Island Collection

EXCLUSIVE I-STRIP FLOORING


15 x 190 x 1,900mm

Oak **SAMUI**

rustic grade, 4 side bevelled edges,
structured, color-processed, hard wax oil white



DROP DOWN



Oak **SAMUI**

rustic grade, 4 side bevelled edges,
structured, color-processed, hard wax oil white
15 x 190 x 1,900mm



Dream Island Collection

EXCLUSIVE I-STRIP FLOORING

15 x 190 x 1,900mm

Oak **BORACAY**

rustic grade, 4 side bevelled edges,
structured, light color-processed, hard wax oil natural



DROP DOWN

The image shows a close-up, horizontal view of a wooden surface made of multiple planks of Oak BORACAY. The wood has a light tan to beige color with prominent, wavy grain patterns and several dark, circular knots. The planks are arranged in a staggered, overlapping fashion, creating a textured, rustic appearance. The lighting is even, highlighting the natural grain and imperfections of the wood.

Oak **BORACAY**

rustic grade, 4 side bevelled edges, structured,
light color-processed, hard wax oil natural
15 x 190 x 1,900 mm



Dream Island Collection


EXCLUSIVE I-STRIP FLOORING

15 x 190 x 1,900mm

Oak **SUMATRA**

rustic grade, 4 side bevelled edges,
structured, dark color-processed, hard wax oil natural



The image shows a close-up of several horizontal wooden planks of Oak SUMATRA. The wood has a dark, rich brown color with prominent grain patterns and some darker spots or knots. The planks are arranged in a staggered, overlapping fashion, typical of a rustic wood floor or wall paneling. The lighting is even, highlighting the natural texture and grain of the wood.

Oak **SUMATRA**

rustic grade, 4 side bevelled edges, structured,
dark color-processed, hard wax oil natural
15 x 190 x 1,900 mm



Dream Island Collection

EXCLUSIVE I-STRIP FLOORING


15 x 190 x 1,900mm

Can. maple **JAVA**

rustic grade, 4 side bevelled edges,
structured, color-processed, hard wax oil natural



DROP DOWN



Can. maple **JAVA**

rustic grade, 4 side bevelled edges,
structured, color-processed, hard wax oil natural
15 x 190 x 1,900 mm

Dream Island Collection

TECHNICAL DATA SHEET

Country of Origin

China

Installation System

Drop-Down

Ready Made Parquet

Dream Island Collection

Composition

3-ply engineered parquet, wood moisture 8% (+/- 1%), 4-sides bevelled edges, top layer approx. 4 mm (+/- 10%), middle layer 9 mm and back layer 2 mm from pine, max. 12.5% nested length per box.

Specification

Oak wooden 1-strip flooring
Maple wooden 1-strip flooring

Packaging

Shrink wrapped, neutral black carton box with label stickers describing product specification. Installation and maintenance guide are included in every second box.

Grading

Rustic: knotty appearance with cracks and sapwood

Thermal conductivity

0.14 W/mK

Dimension

15 x 190 x 1,900 mm

Thermal passage value

0.12 m² K/W

Surface

Structured, color-procelled, wax-oiled finish

Packing units

8 planks

= 1 box

= 2,888 m²

40 boxes

= 1 pallet

= 115.52 m²

12 pallets

= 20' container

= 1,386.24 m²

24 pallets

= 40' container

= 2,772.48 m²



Density and Thickness

550 kg/m³; 14 - 16 mm

Reaction to fire

D₁-s1

Release of formaldehyde

E1

Thermal conductivity

0.14 W/mK

Biological durability

Class 1

Season Collection

I-STRIP FLOORING RUSTIC STYLE

14 x 189 x 1,860 mm



Oak Sunshine

rustic grade, 4 side
bevelled edges,
brushed, natural oiled




Oak Wind

rustic grade, 4 side
bevelled edges,
brushed, white oiled



Oak Twilight

rustic grade, 4 side
bevelled edges,
brushed, smoked,
natural oiled



Oak Thunder

rustic grade, 4 side
bevelled edges,
brushed, smoked,
white oiled



Season Collection

I-STRIP FLOORING RUSTIC STYLE

14 x 189 x 1,860mm

Oak **SUNSHINE**

rustic grade, 4 side bevelled edges,
brushed, natural oiled



Oak **SUNSHINE**

rustic grade, 4 side bevelled edges,
brushed, natural oiled
14 x 189 x 1,860 mm



Season Collection

I-STRIP FLOORING RUSTIC STYLE


14 x 189 x 1,860mm

Oak **WIND**

rustic grade, 4 side bevelled edges,
brushed, white oiled



DROP DOWN



Oak **WIND**

rustic grade, 4 side bevelled edges,
brushed, white oiled
14 x 189 x 1,860 mm



Season Collection

I-STRIP FLOORING RUSTIC STYLE

14 x 189 x 1,860mm

Oak **TWILIGHT**

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled



DROP DOWN

The background of the entire page is a close-up, high-resolution image of oak wood. The planks are arranged in a staggered, horizontal pattern. The wood has a warm, golden-brown hue with prominent, wavy grain patterns and several dark, natural knots. The surface appears slightly textured, consistent with the 'brushed' and 'smoked' finishes mentioned in the text. In the bottom-left corner, there is a white horizontal line above the text.

Oak **TWILIGHT**

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled
14 x 189 x 1,860 mm



Season Collection

I-STRIP FLOORING RUSTIC STYLE

14 x 189 x 1,860mm

Oak THUNDER

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled



Oak **THUNDER**

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled
14 x 189 x 1,860mm

Season Collection

TECHNICAL DATA SHEET

Country of Origin

China

Installation System

Drop-Down

Ready Made Parquet

Season Collection

Composition

3-ply engineered parquet, wood moisture 8% (+/- 1%), 4 sides bevelled edges, top layer approx. 3 mm (+/- 10%), middle layer 9 mm and back layer 2 mm from poplar, max. 25% nested length per box.

Specification

Oak wooden 1-strip flooring

Grading

Rustic: knotty appearance with cracks and sapwood

Packaging

Shrink wrapped, neutral black carton box with label stickers describing product specification. Installation and maintenance guide are included in every second box.

Dimension

14 x 189 x 1,860 mm

Thermal conductivity

0.13 W/mK

Surface

Coated with oxidative natural oil

Thermal passage value

0.12 m² K/W

Packing units

8 planks

= 1 box

= 2.812 m²

40 boxes

= 1 pallet

= 112.493 m²

12 pallets

= 20' container

= 1,349.914 m²

24 pallets

= 40' container

= 2,699.828 m²



Density and Thickness

550 kg/m³ ; 14 - 15 mm

Reaction to fire

D₁-s1

Release of formaldehyde

E1

Thermal conductivity

0.14 W/mK

Biological durability

Class 1

NEW Timed Collection

I-STRIP FLOORING RUSTIC STYLE

14 x 190 x 1,900 mm



Oak Amber

rustic grade, 4 side
bevelled edges,
brushed, natural oiled



Oak Jasper

rustic grade, 4 side
bevelled edges,
brushed, white oiled



Oak Jade

rustic grade, 4 side
bevelled edges,
brushed, smoked,
natural oiled



Oak Opal

rustic grade, 4 side
bevelled edges,
brushed, smoked,
white oiled



Oak Crystal

rustic grade, 4 side
bevelled edges,
brushed, transparent
oiled with SafeTOP®
technology



NEW Timed Collection

I-STRIP FLOORING RUSTIC STYLE

14 x 190 x 1,900mm

Oak **AMBER**

rustic grade, 4 side bevelled edges,
brushed, natural oiled





Oak **AMBER**

rustic grade, 4 side bevelled edges,
brushed, natural oiled
14 x 190 x 1,900 mm



NEW Timed Collection

I-STRIP FLOORING RUSTIC STYLE


14 x 190 x 1,900mm

Oak **JASPER**

rustic grade, 4 side bevelled edges,
brushed, white oiled



DROP DOWN

The background of the entire page is a close-up, high-resolution image of oak wood. The wood grain is prominent, showing various patterns of growth, including wavy lines and distinct knots. The color is a warm, natural tan with some darker, almost black, streaks and spots, likely due to the wood's natural characteristics or the way it was processed. The lighting is even, highlighting the texture and grain of the wood.

Oak **JASPER**

rustic grade, 4 side bevelled edges, b
rushed, white oiled
14 x 190 x 1.900mm



NEW Timed Collection

I-STRIP FLOORING RUSTIC STYLE


14 x 190 x 1,900mm

Oak **JADE**

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled



DROP DOWN



Oak **JADE**

rustic grade, 4 side bevelled edges,
brushed, smoked, natural oiled
14 x 190 x 1,900 mm



NEW Timed Collection

I-STRIP FLOORING RUSTIC STYLE

14 x 190 x 1,900mm

Oak **OPAL**

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled



DROP DOWN



Oak **OPAL**

rustic grade, 4 side bevelled edges,
brushed, smoked, white oiled
14 x 190 x 1,900 mm



NEW Timed Collection

I-STRIP FLOORING RUSTIC STYLE

14 x 190 x 1,900mm

Oak **CRYSTAL**

rustic grade, 4 side bevelled edges,
brushed, transparent oiled with SafeTOP® technology





Oak **CRYSTAL**

rustic grade, 4 side bevelled edges, brushed,
transparent oiled with SafeTOP® technology
14 x 190 x 1,900 mm

NEW Timed Collection

TECHNICAL DATA SHEET

Country of Origin

China

Installation System

Drop-Down

Ready Made Parquet

NEW Timed Collection

Composition

3-ply engineered parquet, wood moisture 8% (+/- 1%), 4 sides bevelled edges, top layer approx. 3 mm (+/- 10%), middle layer 9 mm and back layer 2 mm from poplar, max. 25% nested length per box.

Specification

Oak wooden 1-strip flooring

Grading

Rustic: knotty appearance with cracks and sapwood

Packaging

Shrink wrapped, neutral black carton box with label stickers describing product specification. Installation and maintenance guide are included in every second box.

Dimension

14 x 190 x 1,900 mm

Thermal conductivity

0.13 W/mK

Surface

Coated with oxidative natural oil

Thermal passage value

0.12 m² K/W

Packing units

8 planks

= 1 box

= 2,888 m²

40 boxes

= 1 pallet

= 115.52 m²

12 pallets

= 20' container

= 1,386.24 m²

24 pallets

= 40' container

= 2,772.48 m²



Density and Thickness

550 kg/m³ ; 14 - 15 mm

Reaction to fire

D₁-s1

Release of formaldehyde

E1

Thermal conductivity

0.14 W/mK

Biological durability

Class 1

Instruction

INSTALLATION GUIDE AND MAINTENANCE




Instruction


Quickstart Preparation, Installation, Maintenance

Quickstart


GENERAL

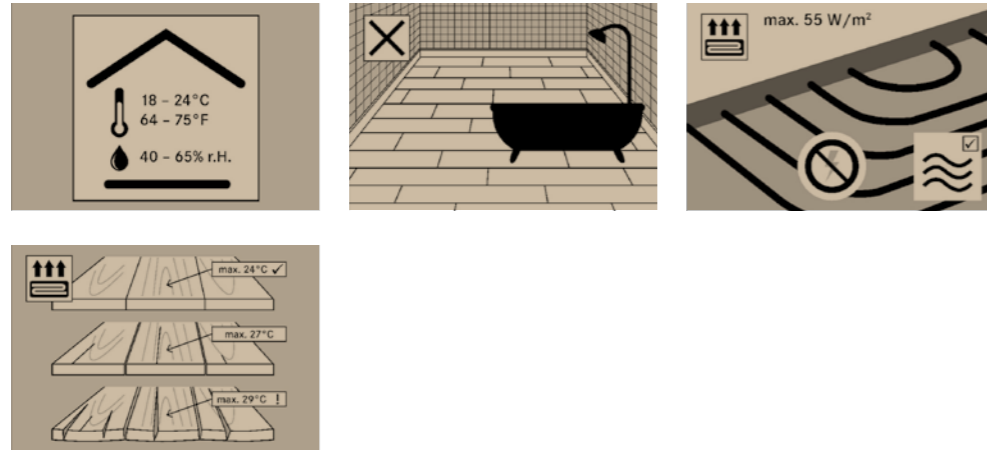


PREPARATION BEFORE INSTALLATION

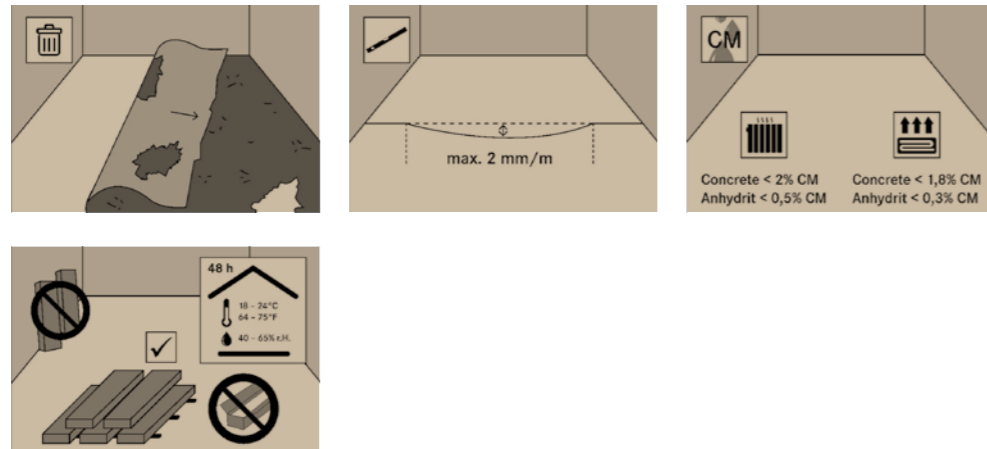


FLOATING INSTALLATION

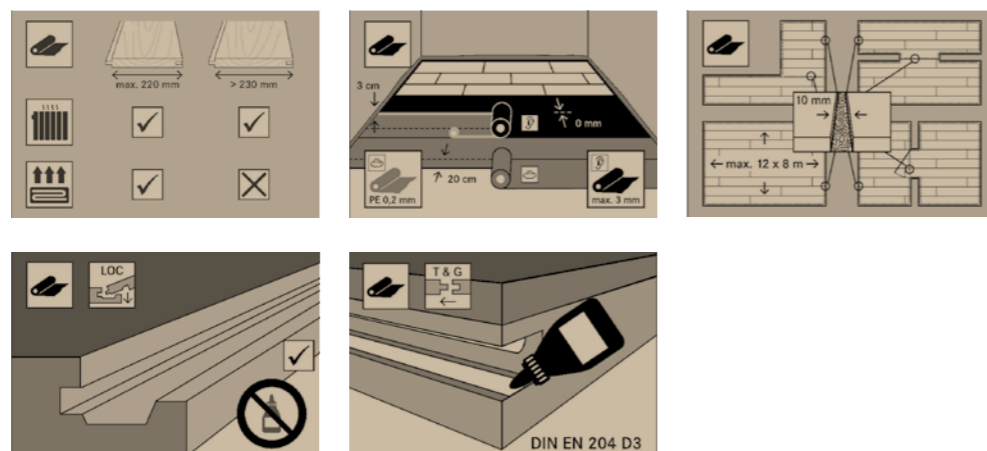





GLUE DOWN INSTALLATION

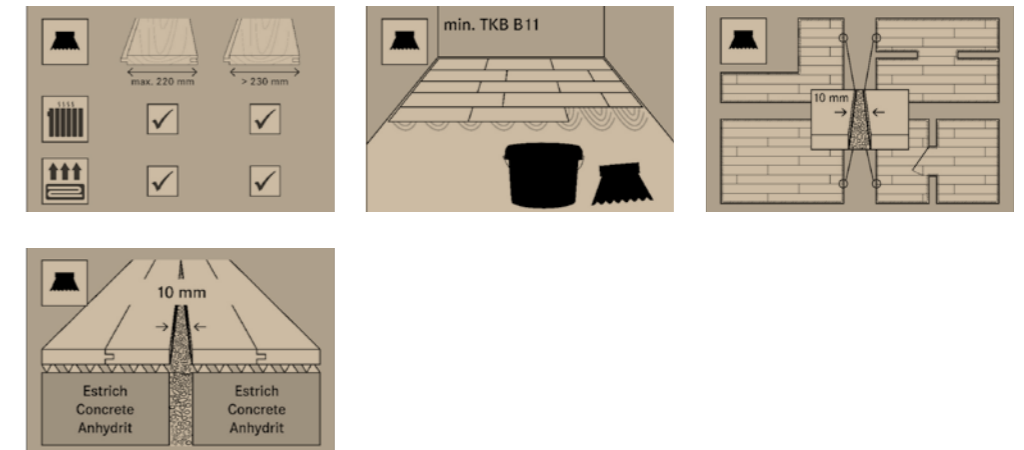



GENERAL RULES FOR INSTALLATION

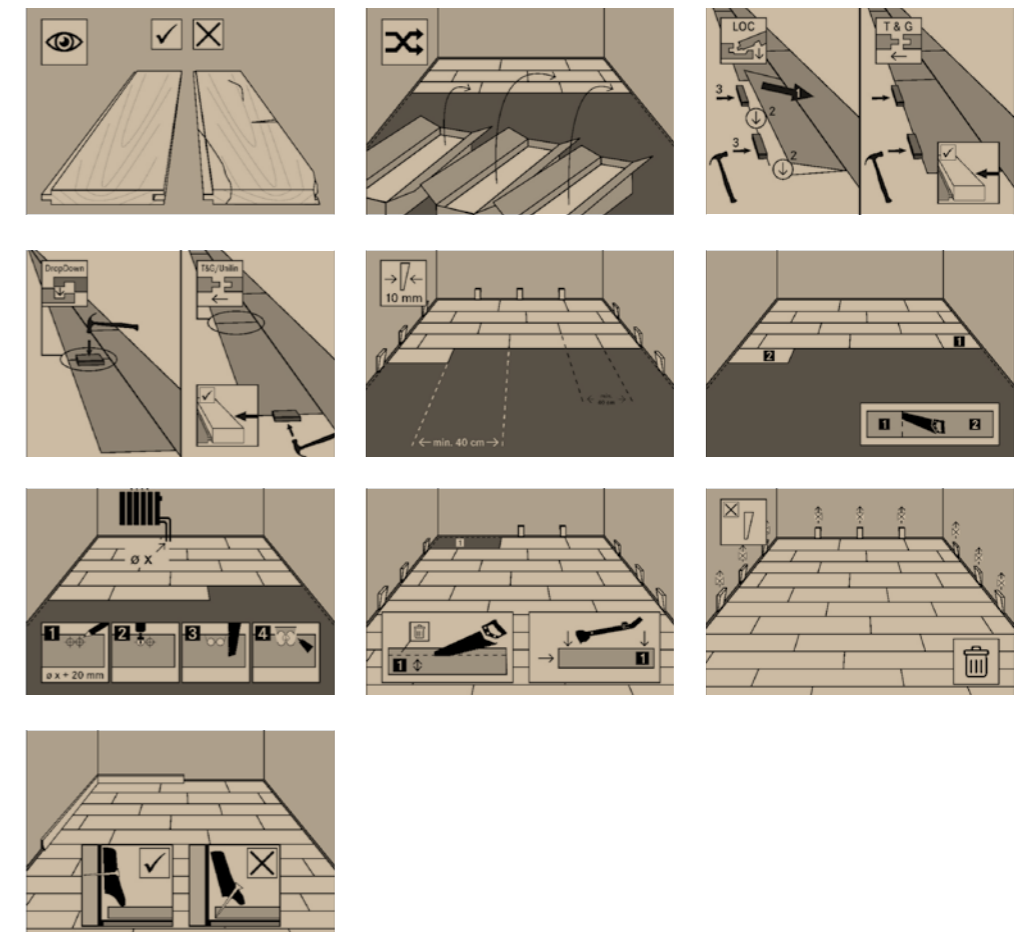

PROTECTION AND CARE



REMARKS



Ablux



Instruction

Preparation

Preparation

Please read this instruction carefully before installation. Violations may cause damages and waive any warranty.

APPLICATION

This engineered flooring is designed for layment in regular heated, dry rooms. The profiling on all 4 edges enables a fast and easy installation. It can be laid as a floating floor or glued down to the subfloor. Glue down installation protects against climate driven deformations. The flooring is suitable for installation on watercirculating underfloor heating (radiant heated floor) according to DIN EN 1264 part 3. For a good heat conduction glue down installation is recommended. 22 cm or wider flooring elements must always be glued down over underfloor heating.

ROOM CLIMATE AND HEATING

All rooms shall be normally heated during installation (minimum 18° C/81° F), the relative humidity must be between 35% and 65%. Excessive moisture during the installation may yield in unexpected tension of the boards. It will normalize after some time.

Maintenance of the correct relative humidity during and after installation reduces the possibility of deformation and the appearance of small openings in the floor. High temperatures from open fireplaces, tiled stoves or intensive sunlight (eg. conservatories) and low humidity may cause open gaps, surface cracks and deformations. During winter there must be appropriate measures taken for air humidification.

Over floor heating the maximum heat output must not exceed 55 W/m² and cover the whole surface. The maximum temperature of the surface must never exceed 29° C. Coverage of floor heating systems with thick rugs or other floor covering may lead to unacceptable heat concentration. Climate driven damages and health disturbances can be minimized if the surface temperatures do not exceed 27° C and the air humidity is controlled between 35 – 65%. At the beginning of each heating season the temperature shall be gradually increased evenly over 7 days until normal heating levels are achieved.

HANDLING OF THE UNOPENED BUNDLES

Engineered flooring elements are precision profiled on all 4 edges and must be handled with care during transport and storage. The original packaging shall be opened immediately prior to installation. During winter months the engineered flooring must remain in unopened packaging for up to 48 hours in order to reach the room temperature.

SUBFLOOR

The subfloor must be free of any carpets, clean, permanently dry, level, firm and structurally sound. Variations in level of the subfloor of more than 2 mm in 1 m (1/8" in 8') have to be filled or planed. The allowable maximum moisture content of a regular subfloor on a dry weight basis is for concrete 2,0%, for anhydrous screed 0,5% and must be verified before installation. With radiant heating the allowable maximum moisture content of the subfloor on a dry weight basis is for concrete 1,8%, for anhydrous screed 0,3%. The subfloor must be dried out according to the heating protocol for radiant heated subfloors and the moisture content be measured prior to the installation. Subfloors with direct contact to the soil, sections which are over unheated rooms or crawl spaces or with increased humidity loads like boiler or laundry rooms always require additional protection against moisture (vapour barrier).

SPACING

Wood as a natural material reacts to changes climate. Between the flooring and walls, and all other hard points, such as door frames or heating pipes there must be a horizontal distance of 10 – 12 mm (1/2"). Wherever possible the flooring is laid under the door frames.

FLOATING INSTALLATION

A moisture barrier of 0,2 mm (6 mil) polyethylene membrane shall be laid directly on the subfloor with approx. 20 cm (8") overlap. The barrier shall go up the walls abt. 5 cm (2"). On a radiant heated floor the overlaps must be taped. The noise protection underlayment of max. 3mm (1/8") thickness is installed without overlap on top of the moisture barrier.

When installed floating under doorways the flooring must be separated into different segment. Floor segments longer than 12 m (40') or wider than 8 m (26') or complex shaped floor plans (e.g. L, Z, or U-shaped, hourglass, bottlenecked or in doorways) or where heavy or fixed installations would restrict the free expansion of the material, the floor must be separated with an expansion gap at a suitable position or glued down onto the subfloor.

GLUE DOWN INSTALLATION

The floor is glued directly on the subfloor. There is no additional glue required between the edges. A vapor barrier primer directly on the subfloor helps to minimize the development of visible openings between the floor elements. We recommend elastic, water- and solvent free adhesives, which are designed for engineered flooring and underfloor heating (radiant heated floor). Please always follow the instructions of the supplier of the adhesive.

Separation gaps between building segments must be copied in the flooring. Other subfloor cuts can be firmly linked and glued over.

TOOLS

Recommended are measuring tape, pencil, angle ruler and a saw, hammer abt. 500g, parquet tool, tapping block and wooden distance spacers. For glue down installation additionally a dented trowel (TKB B11) or an adhesive application tool (Parkett-X-Press) and a tapping tool suitable for glue down installation.



Instruction

Installation Guide and Maintenance

Installation


VISUAL INSPECTION

Wood is a wholly natural product and each piece unique in colour and design. It may be necessary to alternate pieces from different bundles to create a nice visual impression of the floor. Our strict quality control procedures cannot completely eliminate possible defects. Should you find a piece which does not conform to our quality, please return it to the supplier for free exchange. Please check the panels and put defect boards aside. Imperfect and already installed boards cannot be claimed.

INSTALLATION

The flooring elements are to be installed along a perfect straight line, often simply along a straight wall. There is no rule for the orientation of the boards. In principle any desired direction in the room is possible. Layment in an angle is technically possible, however requires additional time and skills.

Start with the first piece, for tongue and groove with the grooves facing to the wall and the tongue heading into the direction of work progress. For UniClic and DropDown profiles the tongue face to the walls and the groove with the longer bottom part face towards the work direction. Beginning from the starter link board by board into the end and finish a complete row. The last piece in the line is trimmed, side pieces are cut to follow the shape of the wall. Adjacent rows always must have an offset of the ends of min. 40 cm.

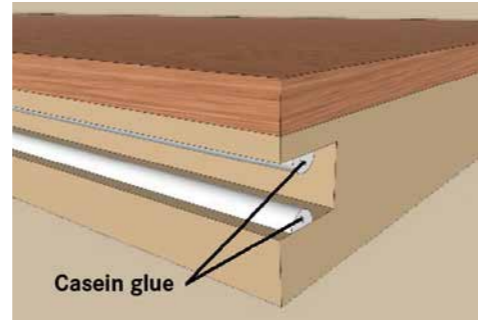

T&G

Always hit with the tapping block against the tongue. When installed floating glue must be applied in the grooves along the edge and the end (see picture).

UniClic

Insert the tongue of the long edge in an angle into the preliminary row, fold the board down and secure with some gentle horizontal taps of the block. First against the long, later against the short edge. Additional glue application is possible but not mandatory.

DropDown

The long edge is folded down as above. The ends are locked into each other during the downfold. Secure the lock of the ends by some gentle hits from above to the face of the board. Additional glue application is also possible but not mandatory.

During installation the expansion gap to all walls is secured with the wooden spacers. After the last floor element is installed, remove all spacers. Trim remainings of the vapour barrier in the height of the surface. The expansion gaps are covered with skirting profiles, transition strips and tube coverings. Remove all loose dirt from the surface.

Maintenance

AN OUNCE OF CARE IS BETTER THAN A POUND OF REPAIR

The right maintenance from the start is important. With the progress of time the floor becomes less demanding and increasingly stress resistant. Following the recommendations outlined below will keep your floor in tip-top condition:

- A good quality doormat in front or just inside a door will save the floor from abrasive mud and dirt. Plus help to reduce cleaning time. Do not forget to clean the doormats too.
- Loose dirt, dust and grit shall be removed by sweeping or vacuuming. Use a vacuum nozzle suitable for wood floors.
- Water causes swelling of the wood and can result in open joints and damage to the floor. Always remove spills and spots immediately with a slightly dampened cloth. Ensure adequate ventilation under flower pots with stick-on floor protectors or equivalent saucers.
- Low humidity or high temperatures, particularly during winter or on underfloor heating, can result in small open joints and fissures in the wood. A comfortable room environment has a relative humidity of about 50 – 60%. It must not drop below 35%. Air humidifiers during winter are recommended. On underfloor heating the use of thick carpets or other floor coverings must be avoided.
- Use casters or slip on floor protectors (no nail-on protectors) under all furniture. Rollers must be soft and meet EN 12529 “soft” (bi-colored rolls). Do not forget to clean the rollers too and exchange them when abrasion is visible. For office furniture chairs there are appropriate protection mats and their use is recommended.
- Strong and wrong cleaners, sand, dry microfibre, acid or alkaline substances (f.e. cement- or gypsum powder, wood ash, water from heating systems, moss remover etc.), solvents, stiletto heels, metal or metal wear can damage the finish and cause imprints, scratches and discoloration.
- For small mechanical damages there are easy to use repair sets available. Ask your dealer.
- For color spots or spills of paint never use sanding paper. There are several solutions available to kill these little mistakes without sanding the floor.
- Only use the following recommended maintenance products and follow the instruction of the suppliers.

CARE AND CLEANING

Finishing, regular cleaning and renovation is done with FAXE products for oiled floors:

- for natural oiled or dark coloured surfaces: FAXE floor soap natural and FAXE maintenance oil natural
- for white oiled surfaces: FAXE floor soap white and FAXE maintenance oil white
- for SafeTOP® products: FAXE floor soap natural and FAXE maintenance oil SafeTOP®

Please always follow the instructions on the labels and the individual instruction for maintenance of SafeTOP® products.

Finishing (first thing after installation) or renovation

Before finishing or renovation with maintenance oil the surface must be cleaned, regardless if brandnew or already used, with FAXE intensive cleaner. FAXE maintenance oil/FAXE Pflegeöl SafeTOP® is applied with a disc machine and a tan pad. Remainings shall be polished away with an oil absorbing cloth.

Regular cleaning


Wet cleaning is done with Faxe floor soap diluted in water 1:40. If there is more dirt use 2 buckets in a 2-step wiping process.



Instruction

Clean & Care

Timeline for clean and care

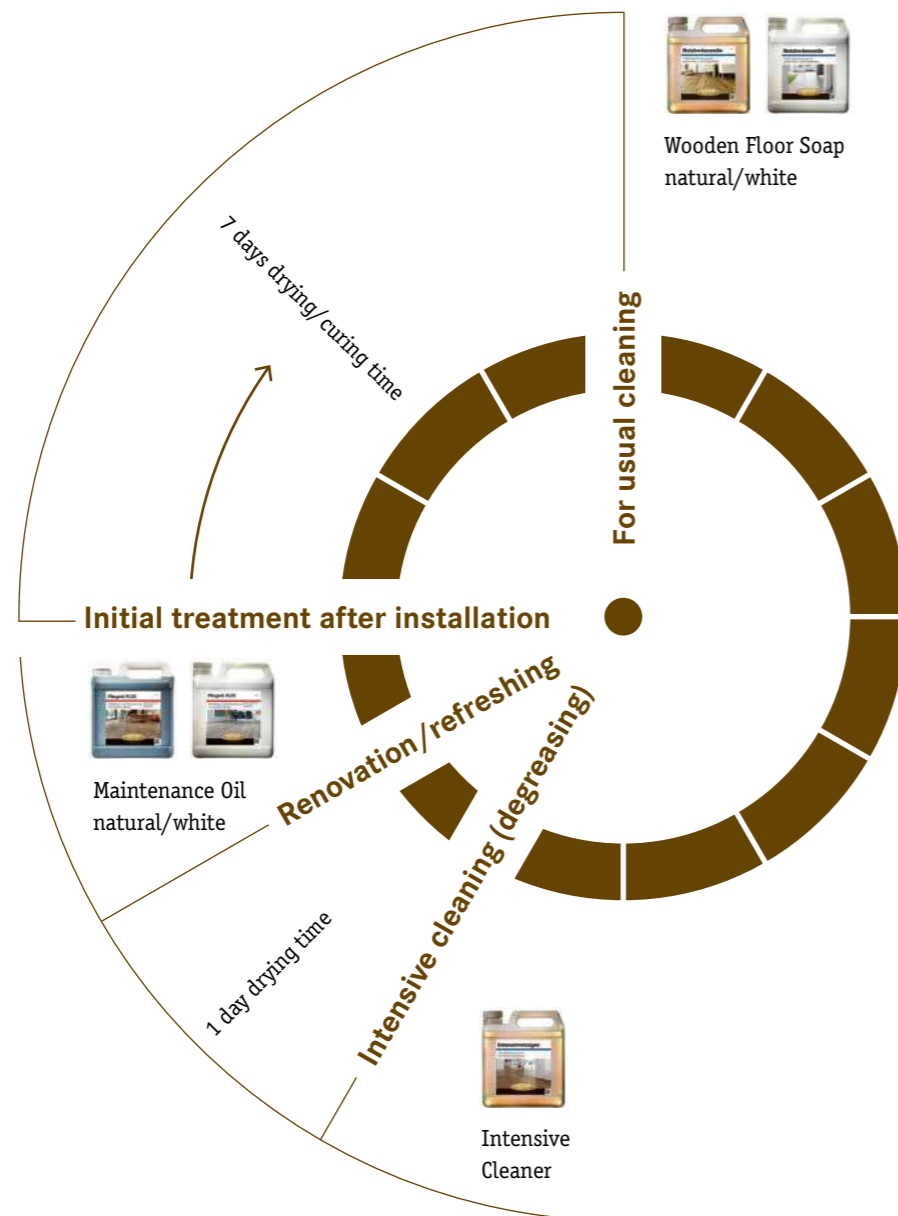

CLEANING PRODUCTS QUICK FINDER

The surface treatment of flooring is a wide range. Not often is the time to study all instruction manuals to be updated with the current stand of technology. FAXE cleaning products are perfect for the usually existing flooring and parquet surfaces. To maintain a floor a correct care product is absolutely essential. Here our recommendation.

SURFACE	INITIAL TREATMENT always when oiled flooring is new installed + MAINTENANCE CARE renovation after basic cleaning	USUAL CLEANING additive for mop water	BASIC CLEANING before maintenance care
SafeTOP®	Only for renovation: Maintenance Oil SafeTOP®	Wooden Floor Soap natural	Intensive Cleaner
Hard oil colorless + colored (Except for white and extrawhite) (All oxidative curing) Residential area	With Rapid Mop: Oilotion With disk type machine: Maintenance Oil natural	Wooden Floor Soap natural Oil Soap natural Active Care matt	Intensive Cleaner
Hard oil white + extrawhite (oxidative curing) Residential area	With Rapid Mop: Oilotion With disk type machine: Maintenance Oil white Manufacturer specific cases: Active Care white	Wooden Floor Soap white Oil Soap white Active Care white	Intensive Cleaner
Hard wax oil	Active Care	Active Care	Intensive Cleaner
Hard oil Commercial area	Disk type machine: Maintenance Oil natural	Active Care	Intensive Cleaner
UV-Oil Engineered flooring	Active Care	Active Care	Intensive Cleaner
Lacquers Engineered flooring	Active Care	Active Care	Parquet Cleaner
Design-Vinyl (LVT - Luxury Vinyl Tiles)	Only for renovation: Active Care matt	Vinyl Cleaner	Vinyl Cleaner
Linoleum	Only for untreated linoleum: Active Care/ Active Care matt	Active Care/ Active Care matt In case of heavily soiled floor: Vinyl Cleaner	Parquet Cleaner



Ablux